

06-29-00

A

JC848 U.S. PTO  
06/28/00Please type a plus sign (+) inside this box → ☐Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 476-1929

First Inventor or Application Identifier Mauger

Title Communications Network

Express Mail Label No. EL 388 802 064 US

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 18]  
(preferred arrangement set forth below)  
- Descriptive title of the Invention  
- Cross References to Related Applications  
- Statement Regarding Fed sponsored R & D  
- Reference to Microfiche Appendix  
- Background of the Invention  
- Brief Summary of the Invention  
- Brief Description of the Drawings (if filed)  
- Detailed Description  
- Claim(s)  
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 10]
4. Oath or Declaration [Total Pages ]  
a. ☐ Newly executed (original or copy)  
b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)  
i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY  
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT  
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

**ADDRESS TO:**Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)  
a. ☐ Computer Readable Copy  
b. ☐ Paper Copy (identical to computer copy)  
c. ☐ Statement verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of  
(when there is an assignee) Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure ☐ Copies of IDS  
Statement (IDS)/PTO-1449 Citations
11. ☒ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired  
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☐ Other: \_\_\_\_\_

**16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment**

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_

Prior application information: Examiner: \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

**For CONTINUATION or DIVISIONAL APPS only:** The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**17. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	William M. Lee, Jr.		
	Lee, Mann, Smith, McWilliams, Sweeney & Ohlson		
Address	P.O. Box 2786		
City	Chicago	State	Illinois
		Zip Code	60690-2786
Country	USA	Telephone	(312) 368-1300
		Fax	(312) 368-0034

Name (Print/Type)	William M. Lee, Jr.	Registration No. (Attorney/Agent)	26,935
Signature	<i>William M. Lee, Jr.</i>	Date	6/28/00

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

jc857 U.S. PTO  
09/606052

06/28/00

Please acknowledge  
receipt of the  
enclosed:  
**Roy Mauger et al.**

**Communications Network**

SERIAL NO: To be assigned

FILING DATE: Herewith

1. Utility Patent Application Transmittal
2. Fee Transmittal for FY 1999 in duplicate
3. Check No. **40384** for \$1008.00
4. Specification with ten (10) sheets of drawings
5. Amendment Accompanying Application
6. Certificate of EXPRESS MAIL.
7. Return Post Card.

DATE SENT: June 28, 2000

WJR:lmb

*"Express Mail" mailing label number*

EL388802064US

*Date of deposit: June 28, 2000*

*I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.*

Richard Sensenbrenner

*(Typed or printed name of person mailing paper or fee)*



*(Signature of person mailing paper or fee)*

476-1929

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

IN RE THE APPLICATION OF

Roy Mauger et al.

SERIAL NO.: To be Assigned

FILED: Herewith

FOR: Communications Network

)  
)  
)  
)  
)  
)  
)

**AMENDMENT ACCOMPANYING APPLICATION**

Commissioner for

Patents

Washington, D.C. 20231

Dear Sir:

It is requested that this application be amended as follows:

**In the Claims**

Claim 15, line 1, delete "10" and substitute - - 14 - -

Claim 16, line 1, delete "11" and substitute - - 15 - -

Claim 17, line 1, delete "12" and substitute - - 16 - -

Claim 20, line 1, delete "15" and substitute - - 19 - -


**Remarks**

The above amendments are being made in order to correct dependency errors.

Examination of the application on its merits is awaited.

June 28, 2000

Respectfully submitted,

  
William M. Lee, Jr.  
Registration No. 26,935

Lee, Mann, Smith, McWilliams,  
Sweeney & Ohlson  
P.O. Box 2786  
Chicago, Illinois 60690-2786  
(312) 368-6620  
(312) 368-0034 (fax)

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

APPLICATION FOR LETTERS PATENT

BY

**Roy Mauger  
47 Beech Avenue  
Radlett  
Hertfordshire  
WD7 7DD  
United Kingdom**

**Dave Stacey  
12 Cresset Close  
Stansted Abbots  
Hertfordshire  
SG 12 8LL  
United Kingdom**

and

**Mark Gibson  
23 East Road  
Bishops Stortford  
Hertfordshire  
CM23 5JG  
United Kingdom**

FOR

**COMMUNICATIONS NETWORK**

COMMUNICATIONS NETWORK

## FIELD OF THE INVENTION

This invention relates to arrangements and methods for the switching or routing of traffic in a communication network

## BACKGROUND OF THE INVENTION

5 Traditionally, two types of legacy telecommunication networks have been developed. The first type of legacy network is connection oriented and is used for the transport of narrow band voice traffic, typically carried in TDM frames. Such networks comprise for example synchronous or plesiochronous networks. The second type of legacy  
10 network is connectionless in nature and is used for the transport of broad band packet or cell-based data traffic. Such packet traffic includes for example Internet protocol (IP) traffic. There is currently a drive towards unified networks which provide end to end transport for both voice and data services, and to this end the use of asynchronous transport has been introduced. This of course introduces the problem of supporting different protocols over a common network.

15 Asynchronous Transfer Mode (ATM) is the technology specified by the ITU-T as a broadband network technology suitable for all applications. For Internet protocol traffic however, ATM has proven to be less than fully effective at supporting Layer 3 routed applications, such as routed virtual private networks. This has led the IRTF  
20 (Internet Research Task Force) to specify multi-protocol label switching (MPLS) as a technology which inherits the desirable characteristics of ATM but is better matched to the Internet protocol. In particular MPLS provides a frame merge function in which data frames received from multiple sources are captured and sent out with a common label. This is required for the support of Internet Protocol Layer 3 Routed  
25 services. Service providers would ideally prefer a single network technology to support all of the services that they provide as this would achieve the lowest possible operational cost.

30 A particular problem with the introduction of a multi-service network is that of accommodating the various transport protocols and, in particular, that of providing end to end quality of service guarantees for high priority traffic such as voice. In particular, there is a need to provide a network that can carry both data and voice traffic at a local, national and international level while utilising a common transport

protocol. A further problem with such a network is that of real time management of the virtual public/private networks that are established within the network. At present, each VPN manager requires a detailed knowledge of the network topology. In a large network this is a very significant operational task.

5

#### SUMMARY OF THE INVENTION

An object of the invention is to minimise or to overcome the above disadvantages.

10 According to a first aspect of the invention, there is provided a method of routing an information packet over a label switched path between first and second end stations in a virtual public/private network defined over a network comprising a hierarchical arrangement of first, second and third levels of routers, the method comprising attaching to the information packet a sequence of labels indicative of a corresponding concatenated sequence of label switched path sections within the virtual  
15 public/private network, each said path section extending between a pair of said routers.

20 According to a further aspect of the invention, there is provided a communications network comprising a hierarchical arrangement of first, second and third levels of routers and over which one or more virtual public/private networks is defined, the network having a management system for routing packet traffic over a said virtual public/private network by attaching to each packet a sequence of labels indicative of a corresponding concatenated sequence of label switched path sections within the virtual public/private network, each said path section extending between a pair of  
25 said routers.

In our co-pending application serial number 09/xxxx (118621DMAuger, the use of a two-layer MPLS network in order to simplify the management of Virtual Public/Private Networks (VPN) is described. In the present application, the use of a four-label stack  
30 provides connection oriented behaviour for voice traffic whilst retaining strict edge control analogous to standard IP network operation. The use of a three layer, five stage hierarchical network of routers enables the technique to be employed over an international or global network.

35 In a preferred embodiment, a four-label stack at the edge of the network is utilised to achieve end-to-end connection oriented behaviour with guaranteed Quality of Service (QoS) whilst requiring no further control actions on the network. The four-label stack

provides sufficient control to establish a required connection end to end across the network.

Advantageously, a virtual private/public network is defined with multiple stages of  
5 constraint-based routed label switched paths.

Multi-protocol label switching (MPLS) is the preferred network routing protocol employed herein. MPLS has been defined by the IETF so as to be substantially independent of the underlying transport mechanism. Mappings on to ATM have  
10 been defined as well as frame-mode networks using HDLC (High-level data link control) based or other forms of frame transport.

MPLS includes the concept of stacked labels. We have found that this concept allows the network arrangements described herein to operate at multiple layers. For  
15 instance a first label in the stack can relate to a traffic trunk. A switch which only swapped this first label would handle the traffic trunk transparently. A switch which popped the first label, swapped the second label and pushed a new first label would be switching a service instance between two traffic trunks. In a particularly advantageous embodiment, a four label stack is used to establish a connection  
20 across a five-stage network in which the only per-connection control action is to assert the four-label stack at the first node of the five-stage network.

In a further aspect, the invention provides a method of selecting a series of tunnels to provide a QoS guarantee for the session in which resource availability from the edge  
25 to multiple central stages is known as well as resource availability from the multiple central stages to the destination edge. The selection is made by offering a number of candidate central stages to the destination edge and allowing the destination edge to select the complete path.

30 Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

35 Preferred embodiments of the invention will now be described with reference to the accompanying drawings in which:-



via a network of core nodes by quality-of-service (QoS) capable tunnels 12. The construction of the core network will be described below. In figure 1, only one core node 18 is shown in the interests of clarity, but it will of course be appreciated that the network will incorporate a plurality of core nodes. Access to the network from user terminals 13 is provided via media gateways 14 each serving to one or more service nodes. Traffic is transported on constraint-based routed label switched paths (CR-LSP) 15 established between respective gateways. The network carries packet traffic, each packet 16 comprising a payload and first and second labels (Label1, Label2) indicative of the path over which the packet is to be routed.

CR-LSPs (constraint-based routed label switched paths) are deployed between the service nodes 11 of the network. Services such as inter-active voice, requiring strict QoS guarantees are supported by end-to-end CR-LSPs 15 as illustrated in figure 1. To take a simple example of QoS support, if all of the CR-LSPs at both traffic-trunk level and end-to-end are constant bit rate, then the performance of the end-to-end CR-LSP can be substantially equivalent to ATM-AAL1 (Asynchronous Transfer Mode Adaptation Layer One) assuming a typical 48-byte packetisation.

The IETF has defined two protocols for the establishment of CR-LSPs. These protocols are RSVP-Traffic Engineering, and Constraint-routed Label Distribution Protocol. CR-LSPs (constraint-based routed label switched paths) are point-to-point paths between designated network nodes. Such paths are each assigned a traffic contract which, in suitable carrier strength implementations, will be policed for conformance. The following description of the best method of performing the invention is based on the CR-LDP protocol, but it will be appreciated by those skilled in the art that the RSVP-TE protocol has equivalent functionality and can be used to serve the same purpose. Such a CR-LSP (constraint-based routed label switched path) has an LSPID (label switched path identifier) which can be used to specify a hop in a CR-LDP request. In such a case the new CR-LSP will be multiplexed into the specified CR-LSP and allocated a second level label. It is therefore possible to specify within the network of figure 1 a virtual public/private network (VPN) with multiple stages of first level CR-LSPs and to provide end-to-end services having a CR-LSP traffic contract.

A feature of the constraint based routed label distribution protocol (CR-LDP) employed in the network of figure 1 is the use of an "abstract node" to define routing constraints. An abstract node consists of a sub-network of real nodes (core nodes)

over which the constraint based routed label distribution protocol is allowed to select any available path to achieve a requested connection. Thus in a path specified as (real node A - abstract node B - abstract node C - real-node D) there may be multiple real nodes in each of the abstract nodes, and there may also be multiple trunks  
5 between the abstract nodes. This concept of abstract nodes simplifies the management of a VPN as the network manager only requires a view of the network at the abstract node level and does not require detailed view of the construction or internal operation of an abstract node.

10 Referring now to figure 2, which is also introduced for explanatory and comparative purposes, this depicts in schematic form a portion of the network of figure 1. Figure 2 is a representation of a simple network in its abstract node form, together with a possible real network realisation of one of the abstract nodes.

15 The network represents groups of multiple service nodes (SN) 11 each arranged around a respective abstract node (AN) 22 in each of four locations. One of the abstract nodes 22 is shown in detail to illustrate its construction from a sub-network of four core nodes (CN) 18 with multiple transport links 23 therebetween. In the network of figures 1 and 2, an abstract node is defined by an IP address prefix, and  
20 all core nodes which include that prefix in their IP address are treated as part of that abstract node. It will of course be understood that an abstract node may be constructed from some other number of core nodes. Further, abstract nodes can have a temporary, semi-permanent or permanent existence depending on the network requirements.

25 Constraint based routed label switched paths 15 are deployed between service nodes 11 via the appropriate intervening abstract nodes 22.

In the arrangement of figures 1 and 2, it is relatively simple for a management system  
30 controlling the real network to produce an abstract node version of its information model for use on a super-ordinate network manager. It is also relatively easy to produce a graphical representation of such a network and to specify traffic trunks by defining paths between service nodes and passing through abstract nodes. These graphical paths can then be used to automatically construct CR-LDP requests to  
35 establish the traffic trunks. CR-LDP can run on an existing constraint-based routed label switched path (CR-LSP) to renegotiate the traffic contract so that the technique provides for near real-time creation of VPNs as well as flexible service level

agreements which can be modified e.g. on a diurnal basis or on any basis which suits the customer traffic profile.

- A management and bearer control function for the Layer 1 physical network of figures 1 and 2 is illustrated in figure 3. This figure shows by way of example a simple network based on a group of core nodes 18, constituting an abstract node 22, and service nodes 11. The real network has a management system based on a hierarchical structure of element managers 31 and (sub) network managers 32. The (sub) network manager 32 is responsible for constructing the abstract node information model representation of the network, which information is passed to a super-ordinate manager 33. A sub-ordinate manager 36 provides virtual switch management to perform fault, configuration, accounting, performance, and security management. The super-ordinate manager 33 is used for defining VPNs and placing traffic trunks to realise those VPNs. The super-ordinate manager also creates, modifies and deletes virtual switches. Traffic trunk requests are passed to bearer control Layer 1 (34) to initiate the CR-LDP process. This is the interface point for MPLS Layer 1 Bearer Control for which the common open policy service protocol (COPS) is preferred.
- The information model illustrated in figure 4 for the sub-network manager 32 is also simplified in that only the Layer 2 virtual switches (VS) 41 are visible. These virtual switches are configured with access ports 42 to which users are connected and traffic trunks 43 configured end-to-end and provisioned with SLAs.
- In figure 5 the concept of a dynamic multiplex label switched path (DM-LSP) according to a preferred embodiment of the invention is illustrated. In the exemplary network of figure 5, a hierarchical three layer arrangement of local nodes 51a, regional nodes 51b and international nodes 51c is provided, each node comprising a label switched router. Within the three layer network of MPLS label switched routers (LSR) 51a, 51b, 51c, a mesh of Layer 1 label switched paths (LSPs) 52 is established. As described above it is possible to define the constraints for a new label switched path (LSP) in terms of existing LSPs, in which case a Layer 2 LSP is established and a second level label defines the embedded CR-LSP. In the dynamic multiplex-LSP arrangement of figure 5, a third level label is defined which relates to one of a number of sessions which can be dynamically multiplexed onto the same label switched path (LSP).. In our arrangement depicted schematically in figure 5, a new session may be multiplexed onto the dynamic multiplex -LSP if and only if the

resource constraints of the ingress and egress Layer 1 CR-LSPs are satisfied. The checking of these constraints can be performed in the first and third stage LSRs (label switched routers) 51a, 51c, which have full visibility of the resources committed to the ingress and egress Layer 1 LSPs respectively. The Layer 2 LSRs 51b perform an implicit switching function in that sessions may be dynamically routed between first and third stage LSRs 51a, 51c, using any available Layer1 CR-LSP, but the second stage LSRs 51b are not involved in the control process. Figure 5 also illustrates a number of LSRs which are used to route the Layer 1 CR-LSPs. These are additional network stages that may be required for the traffic management of large numbers of VPNs, but they need not be directly involved in the operation of the DM-LSPs.

An exemplary five-stage virtual private network (VPN) with four-layer label control is illustrated in figure 6. The network comprises a hierarchical or layered structure of local routers 61a, local tandem routers 61b and national tandem routers 61c. A super-ordinate manager 60 is responsible for configuring one or more virtual private networks within the network structure of figure 6.. This VPN configuration is performed by defining the Layer 1 LSPs (label switched paths) in terms of service level agreements and constraints for their routing through the network. This information is formulated as a COPS (Common Open Policy Service) command which is pushed down to the label switch router (LSR) 61a which forms the ingress of the requested CR-LSP. The super-ordinate manager 60 also pushes the COPS commands to an admission manager (AM) 64 within media gateway controller 65, which admission manager records resources available for use in service requests, the admission manager 64 then pushes the COPS messages down to the label switched routers (LSRs) 61a, 61b, 61c, where they are used to invoke RSVP-TE or CR-LDP sessions in order to establish the virtual private network (VPN). The super-ordinate manager 60 then establishes a mesh of DM-LSPs (dynamic multiplex label switched paths) 66 between all of the local label switch routers 61b and all of the national tandem label switch routers 61c. This mesh establishes a network in which a constraint-based routed label switched path (CR-LSP) between any two local label switch routers can be specified by a pair of DM-LSPs (dynamic multiplex label switched paths). For a full mesh configuration, there are as many alternative routes between each pair of local label switch routers as there are national tandem label switch routers deployed in the network. After the super-ordinate manager 60 has configured the core network, the admission manager 64 configures a set of label switched paths between the media gateway 67 coupled to user terminal 68 and the

local LSR node 61a. When a media gateway controller 65 wishes to establish a session with QoS guarantees it requests its associated admission manager 64. A session request may be initiated directly by a session control protocol such as Q1901 or SIP, or it may be initiated as a result of intercepting an RSVP message.

5 Communication between the media gateway controllers advantageously uses a protocol which is able to tunnel connection control information such as Q1901, SIP or RSVP. The connection control information which is tunnelled between media gateway controllers is a list of label switched path identifiers (LSP-Ids). In the forward direction this information comprises a list of candidate dynamic multiplex

10 label switched paths (DM-LSPs) which are suitable to access a national tandem together with an LSP-ID (label switched path identifier) for the media gateway (MG) to local LSR connection. In the reverse direction the control information comprises a list of the four LSP-IDs selected to form the end-to-end connection. I.e. MG-Local LSR, Local LSR-National Tandem LSR, National Tandem LSR-Local LSR, Local

15 LSR-MG. The scheme may be operated separately for each direction of transport or bi-directional operation could be chosen. The five-stage network of figure 6 accommodates long distance or global traffic; fewer stages would be required for local services. On receipt of the list of the four LSP-IDs defining an end-to-end connection, the admission manager 64 uses COPS to push the list down to the local

20 node 51a for routing to the far-end media gateway 67a. The Local LSR response is to push four labels on to all packets received from the label switched path (LSP) identified as the connection from the local media gateway and then to forward the labelled packets. The media gateway may use labels internally, in which case the payload from the perspective of the Local LSR 61a will contain labels of significance

25 only to the two media gateways involved. The first two labels are the two associated with the dynamic multiplex-LSP to the national tandem router 61b, which labels were allocated when the virtual private network was configured, and are stored in the local LSR 51a as related to its LSP-ID. The next two labels receive special treatment. An LSP-ID is intended for use as a network wide significant identifier for use in

30 management systems as well as in LSRs. This LSP-ID comprises the IP Address of the ingress node of the CR-LSP as well as a sixteen bit locally significant identifier within that node. This locally significant identifier is sufficient to identify the DM-LSP from the National Tandem LSR 61b to the destination Local LSR 61a and from the Local LSR to the media gateway. These LSP-ID local identifiers are therefore used

35 as the third and fourth labels and are treated as indirect addresses at the national tandem and local LSRs respectively.

We have found that a network having three hierarchical levels of routers is effective in providing international or global coverage, and that a virtual private network may be defined therein as a sequence of quality of service (QoS) tunnels each established between routers of adjacent hierarchical levels. In such a virtual private  
5 network, a stack of four labels will always be sufficient for the identification of a end to end path across the network.

The process of the COPS (Common Open Policy Service) protocol referred to above allows the policy being applied to a particular controlled flow on an MPLS router to be  
10 asynchronously updated. That is, the MPLS router is told how to change the treatment it applies to the flow, without first asking to change it. This process is underpinned by the use of ClientHandles to identify the flow. When the path for a new flow is received at an admission manager, a COPS Decision (DEC) message is pushed, that uses the ClientHandle associated with the outermost LSP. This  
15 performs the selection of the first layer ER-LSP. Contained within this DEC message is the list of paths over which the flow is to be routed. This list will include the LSP-ID of the near-end dynamic multiplex, the LSP-ID of the far-end dynamic multiplex and the LSP-ID of the connection from the far-end local switch to the destination media gateway.

20 To facilitate the transfer of this information, a preferred embodiment of the invention defines a new COPS Specific Object. This object is shown schematically in figure 7. The object uses the existing COPS Specific Object pattern and has a CNum of 40 and CType of 2. The CNum is the identifier for the object, and the CType is the  
25 instance of the object. The object contains the list of LSP-IDs for the flow in the order in which they are to be used. Therefore LSP-ID 1 indicates the near-end dynamic multiplex and will be translated at the Local LSR into a two-tier label stack. Note that although the Clienthandle identifies the layer 1 trunk, this trunk and the dynamic multiplex share the same LSP-ID space at the local router and therefore LSP-ID 1  
30 can easily identify the correct label stack. LSP-ID 2 will contain the LSP-ID of the second dynamic multiplex and LSP-ID 3 will contain the LSP-ID of the last hop from the far-end Local LSR to the media gateway. These next two values are the full forty eight-bit LSP-IDs. In order that these two values should be copied in the same order into each packet in this flow as defined above, they must undergo suitable  
35 translation. As is illustrated in figure 7, each LSP-ID consists of a thirty two-bit IP address and a sixteen-bit LSP number. It is the sixteen bit LSP number that is of interest so each LSP-ID must have the IP address removed and replaced with four

leading zeros. This makes use of the fact that inserting leading zeros on a binary number leaves the value of that number the same i.e. 1101 = 0000 1101.

With this translation performed, the LSP-IDs should be inserted in the same order as they occur in the COPS message, into the header of each packet in this flow at the Local LSR. That is, LSP-ID 3 should be the innermost of the labels. Once this is successfully completed, a Report State (RPT) message is sent back, indicating that the new session has been successfully installed.

- 10 By analogy with the PSTN, five stages of switching are considered desirable for QoS capable networks leading to Local/Local-Tandem/National-Tandem/Local-Tandem/Local routing for national services and Local/Local-Tandem/International-Tandem/Local-Tandem/Local routing for international services.
- 15 By way of example of the efficacy of the techniques described above, consider a carrier having 50 million customers in the USA and a further 50 million customers in the rest of the world with 0.1 Erlang of session traffic per customer. Assume that typically 40% of traffic is long distance and 10% of traffic is international. The United States network could be organised with e.g. five hundred local nodes with typically 100,000 customers each. The Local-Tandems could be disposed in e.g. fifty groups with two switches in each group dedicated to National and International traffic. Approximately one hundred national-tandems and twenty five international-tandems would be deployed throughout the world to provide a global network. In this scheme the local nodes would typically support only 10,000 Erlangs and no tandem node would need to support more than 25,000 Erlang of session traffic. These are trivial amounts of traffic by modern standards and this readily demonstrates the flexibility and efficacy of the five-stage network described herein. The connectivity of such a network is illustrated schematically in figure 8. The nodes 71a, 71b, 71c as illustrated in figure 8 are typically virtual nodes, and it will be appreciated that a real physical switch could support a number of such virtual nodes.

- The label processing in each of the five nodes is illustrated schematically in figure 9. As shown in this figure, the Local LSR 61a receives a packet with the label 81 assigned to the MG-LSP A at configuration time. The payload is retrieved and four labels are pushed: These four labels comprise the information, Tunnel A Label/DM-LSP A Label/LSP-ID of DM-LSP B/LSP-ID of MG-LSP B. Assuming penultimate hop popping, then the packet received by the local tandem node 61b is headed by the

003290" 2500050

DM-LSP A Label. As this is the penultimate node for the DM-LSP A, its label is popped. The payload and remaining labels are then sent out on Tunnel B with Tunnel B Label. Again with penultimate hop popping the packet received by the national tandem 61c is headed by the LSP-ID of DM-LSP B this label is consumed to  
5 identify DM-LSP B and the label pair Tunnel C Label/DM-LSP B Label are pushed. At the distant local tandem, the DM-LSP B Label is recognised as a penultimate hop for DM-LSP B and is thus popped. The payload and remaining labels are sent out on Tunnel D with Tunnel D Label. At the destination local LSR 61a, the packet is headed by the LSP-ID of MG-LSP B, this is consumed in identifying MG-LSP B and  
10 the packet is delivered to the media gateway with MG-LSP B Label which was established when MG-LSP B was configured.

The overall control environment for five-stage MPLS networks is illustrated in figure 10. Each admission manager 64 associated with a media gateway controller 65  
15 maintains a regular dialogue with the dynamic multiplex -LSP control functions in the national and international tandems. On a routine basis, the admission manager informs the DM-LSP control of its current utilisation of resources on a particular dynamic multiplex -LSP. This allows the dynamic multiplex -LSP control to evaluate the resource utilisation on the hidden tunnel (i.e. egress from local LSR to national tandem or ingress from national tandem to local) for this dynamic multiplex -LSP and  
20 to offer an explicit allocation of resources to the admission manager for the next control interval. Assuming typical session holding times equivalent to current PSTN practice of about 120 seconds, then control intervals of 10 or 20 seconds would be appropriate. When a session request arises, the admission manager on the  
25 originating side is able to select an MG-LSP A and to nominate candidate dynamic multiplex -LSPs Ax, Ay, Az which have sufficient allocated resource for the session. The terminating side admission manager is now able to define the LSP-ID tuple for the connection by inspecting candidate dynamic multiplex -LSPs Bx, By, Bz. After selection, the admission manager offers MG-LSP A/DM-LSP A/DM-LSP B/MG-LSP  
30 B, this is then used by the admission manager to push the end-to-end connection. If the DM-LSP control function is cautious in allocating resources to admission managers, then the whole process is deterministic and the Layer 1 tunnels are never overloaded. Thus, with wirespeed operation of all LSRs and CBR contracts for the Layer 1 tunnels, end-to-end MPLS services behave as a substantially exact  
35 equivalent to end-to-end ATM CBR traffic. This assumes that all physical ports between nodes are at OC12/STM4 or higher speeds and that the normal packet size of IP of 1500 bytes is not exceeded.

It will be understood that the above description of a preferred embodiment is given by way of example only and that various modifications may be made by those skilled in the art without departing from the spirit and scope of the invention.

**CLAIMS:-**

1. A method of routing an information packet over a label switched path between first and second end stations in a virtual private network defined over a network arrangement comprising a hierarchical arrangement of levels of routers, the method comprising attaching to the information packet at a network edge a sequence of labels indicative of a corresponding concatenated sequence of label switched path sections within the virtual private network, each said path section extending between a pair of said routers.
2. A method as claimed in claim 1, wherein said network has a hierarchy of first, second and third levels of routers.
3. A method as claimed in claim 2, wherein said sequence of labels comprises first, second, third and fourth labels.
4. A method as claimed in claim 3, wherein each said virtual private network is defined by a network of quality of service capable tunnels each disposed between a respective pair of routers.
5. A method as claimed in claim 4, wherein said first label defines a route from a first level router to a second level router, said second label defines a route from the second level router to a third level router, said third label defines a route from the third level router to a further second level router, and said fourth label defines a route from the further second level router to a destination first level router.
6. A method as claimed in claim 5, wherein said label switched path sections are incorporated in dynamic multiplexed label switched paths comprising first-stage and second-stage Layer 1 constraint-based routed label switched paths.
7. A method as claimed in claim 6, wherein a new session is multiplexed on to a said dynamic multiplexed label switched path only if the resource constraints of the first-stage and second-stage Layer 1 constraint-based routed label switched paths are satisfied.
8. A method as claimed in claim 7, wherein the labels defining the sequence of tunnels are assigned during tunnel establishment.

9. A method as claimed in claim 8, wherein the labels defining the sequence of tunnels each identify a respective tunnel by means of a label switched path identifier.

5

10. A method of selecting a series of tunnels between a source edge and a destination edge in a communications network having multiple central stages to provide a path having a quality of service guarantee, wherein resource availability from the source edge to the multiple central stages and from the multiple central stages to the destination edge is established, and wherein the selection is made by offering a number of candidate central stages to the destination edge and allowing the destination edge to select the complete path.

10

11. A method as claimed in claim 10, wherein said network has a hierarchy of first, second and third levels of routers.

15

12. A method as claimed in claim 11, wherein said path selection is identified by a stack of labels comprising first, second, third and fourth labels, and wherein said label stack is attached to an information packet routed on the selected path.

20

13. A method as claimed in claim 12, wherein said first label defines a route from a first level router to a second level router, said second label defines a route from the second level router to a third level router, said third label defines a route from the third level router to a further second level router, and said fourth label defines a route from the further second level router to a destination first level router.

25

14. A communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels and incorporating a frame-mode MPLS architecture, wherein end-to-end QoS guaranteed services are provided by defining a label stack which delivers packets through a concatenated sequence of tunnels defined by successive labels in the label stack.

30

15. A communications network as claimed in claim 10, wherein said concatenated sequence of tunnels comprises label switched path sections incorporated in dynamic multiplexed label switched paths comprising first-stage and second-stage Layer 1 constraint-based routed label switched paths.

35

16. A communications network as claimed in claim 11, wherein a new session may be multiplexed onto a said dynamic multiplexed label switched path only if the resource constraints of the first-stage and second-stage Layer 1 constraint-based routed label switched paths are satisfied

5

17. A communications multi-service network as claimed in claim 12, wherein said network comprises a three layer a five -stage MPLS network, and wherein a stack of four labels is used to define a sequence of four tunnels within.

10 18. A communications network comprising a hierarchical arrangement of first, second and third levels of routers and over which one or more virtual private networks is defined, the network having a management system for routing packet traffic over a said virtual private network by attaching to each packet a sequence of four labels indicative of a corresponding concatenated sequence of label switched  
15 path sections within the virtual private network, each said path section extending between a pair of said routers.

19. A communications network as claimed in claim 18, wherein the first level routers comprise local routers, the second level routers comprise local tandem routers  
20 and the third level routers comprise national tandem routers.

20. A communications network as claimed in claim 15, wherein user access to the network is provided via a media gateway.

25 21. A method of determining a label switched path in a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels to provide a QoS guarantee for a session in which resource availability from the network edge to multiple central stages and resource availability from the multiple central stages to the destination edge are  
30 established, the method comprising; selecting a series of said quality of service capable tunnels, wherein said tunnel selection is made by offering a plurality of candidate central stages to the destination edge and allowing the destination edge to select a complete path across the network.

35 22. A method as claimed in claim 21, wherein said network has a hierarchy of first, second and third levels of routers.

23. A method as claimed in claim 22, wherein said sequence of labels comprises first, second, third and fourth labels.

5 24. A method as claimed in claim 23, wherein said network is defined by a network of quality of service capable tunnels each disposed between a respective pair of routers.

10 25. A method as claimed in claim 24, wherein said first label defines a route from a first level router to a second level router, said second label defines a route from the second level router to a third level router, said third label defines a route from the third level router to a further second level router, and said fourth label defines a route from the further second level router to a destination first level router.

15 26. A method as claimed in claim 25, wherein said label switched path sections are incorporated in dynamic multiplexed label switched paths comprising first-stage and second-stage Layer 1 constraint-based routed label switched paths.

20 27. A method as claimed in claim 26, wherein a new session is multiplexed on to a said dynamic multiplexed label switched path only if the resource constraints of the first-stage and second-stage Layer 1 constraint-based routed label switched paths are satisfied.

25 28. A method as claimed in claim 27, wherein the labels defining the sequence of tunnels are assigned during tunnel establishment.

29. A method as claimed in claim 28, wherein the labels defining the sequence of tunnels each identify a respective tunnel by means of a label switched path identifier.

ABSTRACTCOMMUNICATIONS NETWORK

- 10 A label switched path is determined in a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels to provide a QoS guarantee for a session in which resource availability from the network edge to multiple central stages and resource availability from the multiple central stages to the destination edge are established. A series of quality of service capable tunnels is selected by offering a plurality of candidate central stages to the
- 15 destination edge and allowing the destination edge to select a complete path across the network. A label stack comprising a set of four labels is attached to a payload to define a selected sequence of tunnels.

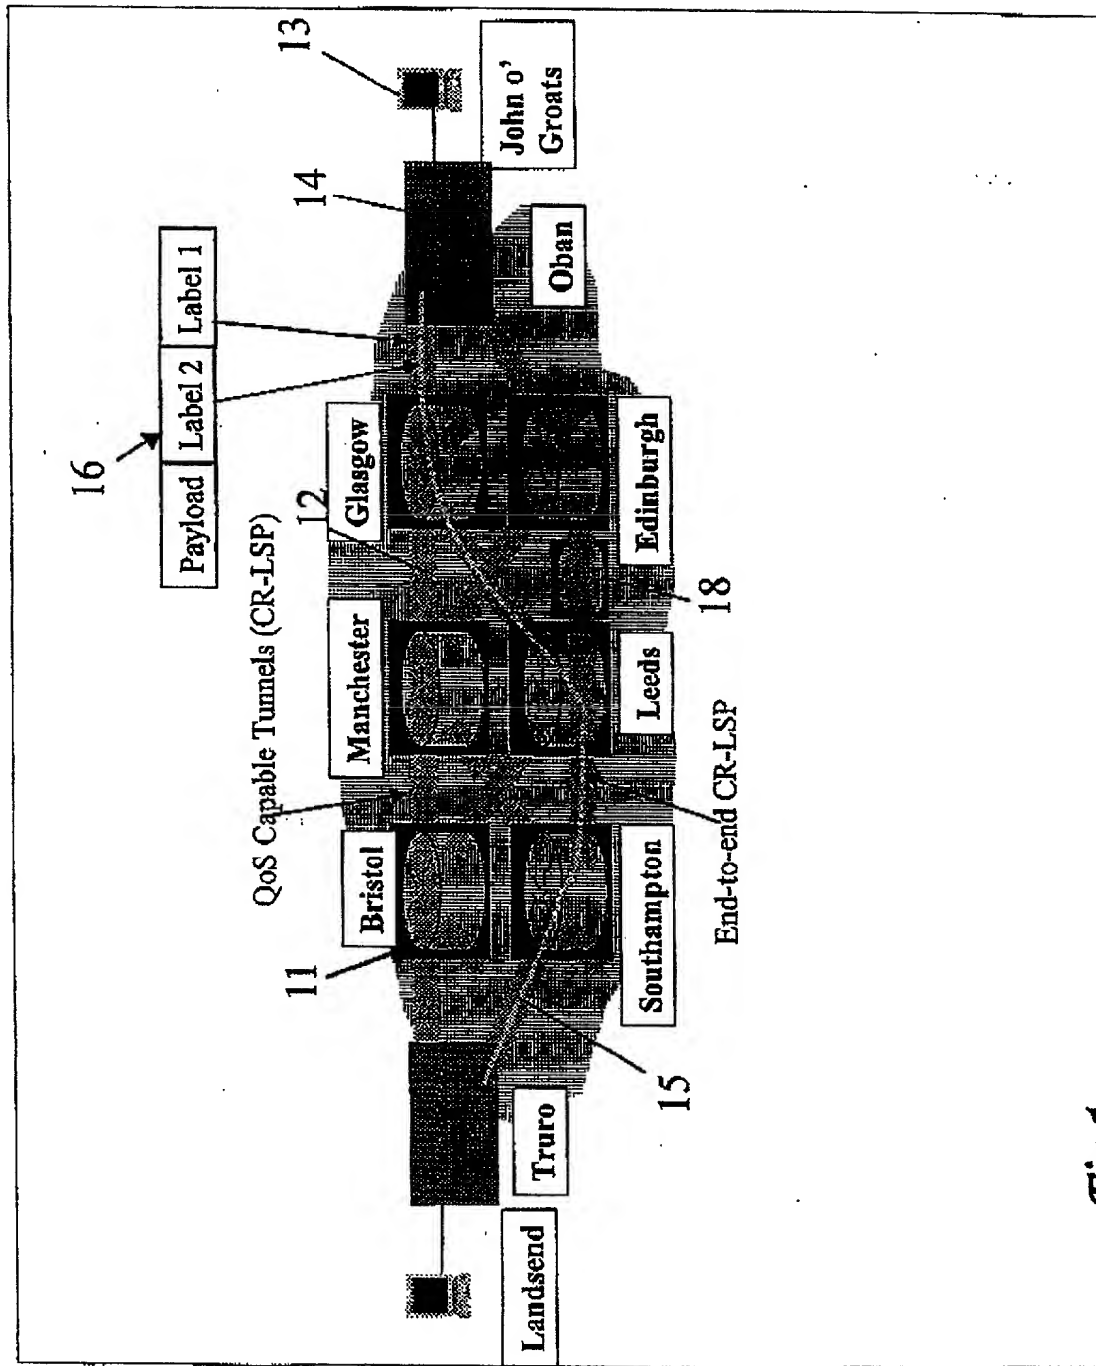


Fig.1






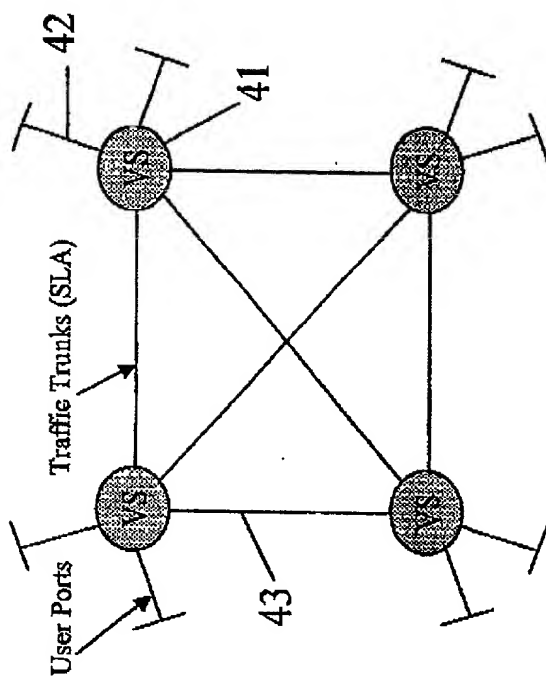


Fig.4

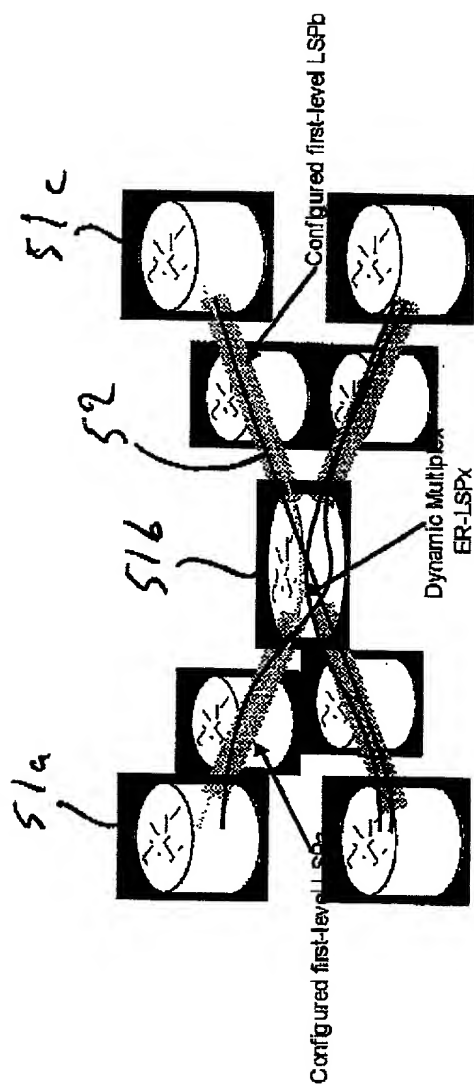

Dynamic Multiplex ER-SPx may be used to switch a new session if and only if the capacity contracts of LSP a and LSP b are not exceeded by this new request.

**Figure 5 Dynamic Modulus  $E^*$  vs  $\omega$  for PS**


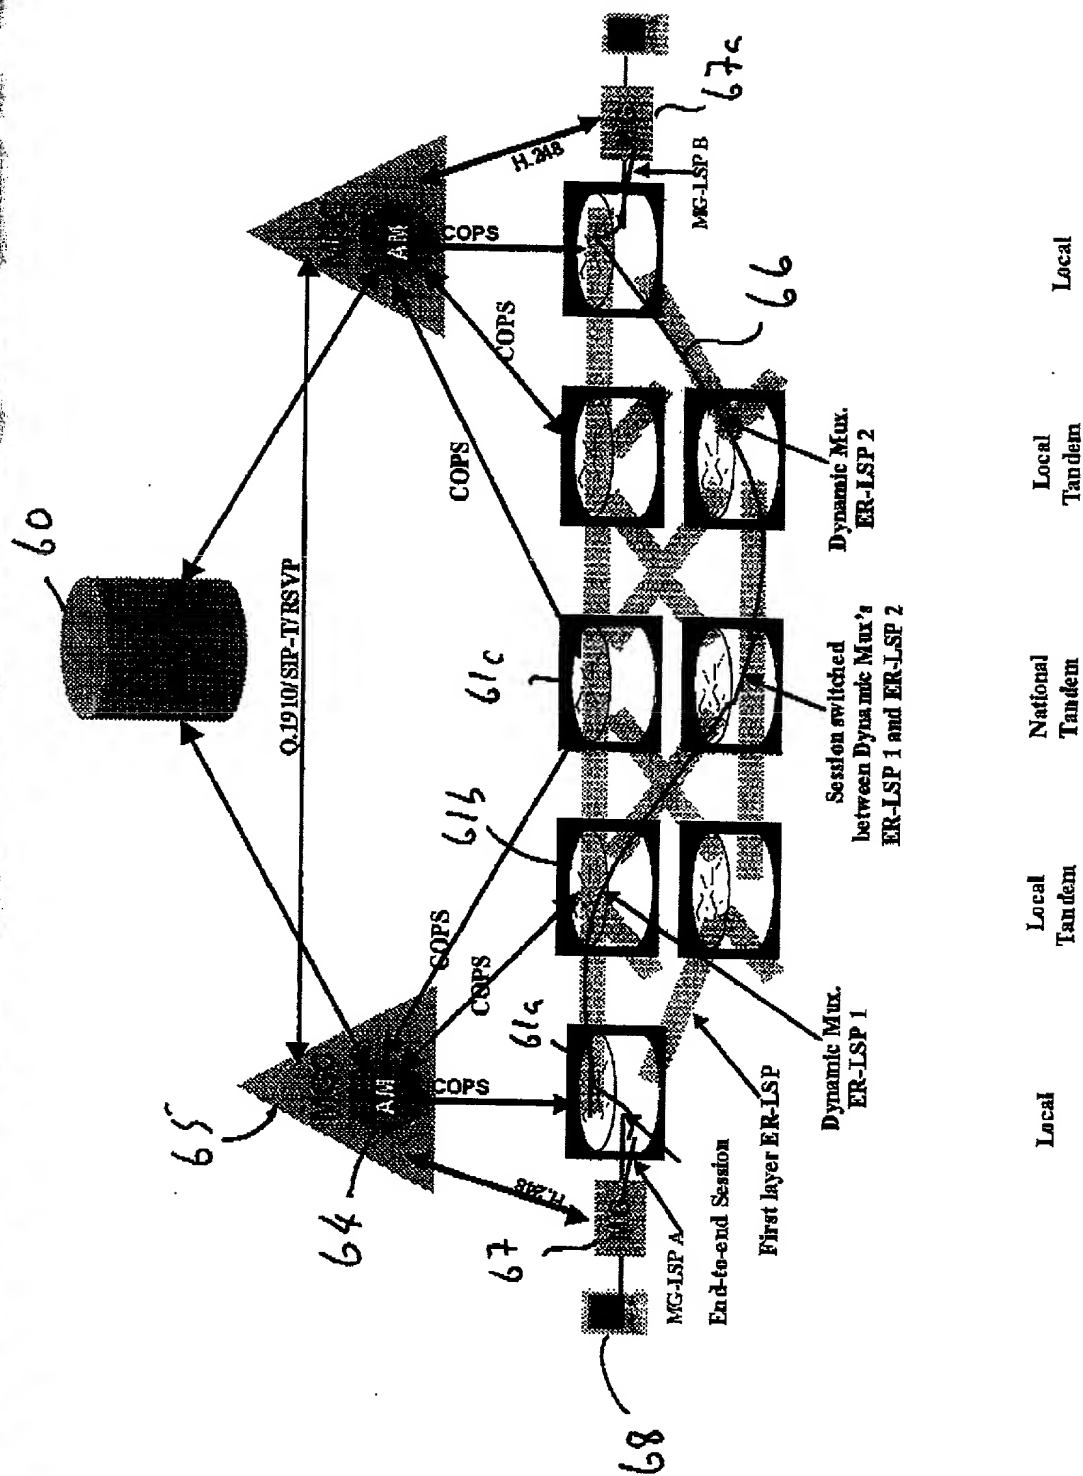


Figure 6 Five-stage VPN with Four-layer Label Control


32-bit IPv4 address

16-bit LSP number

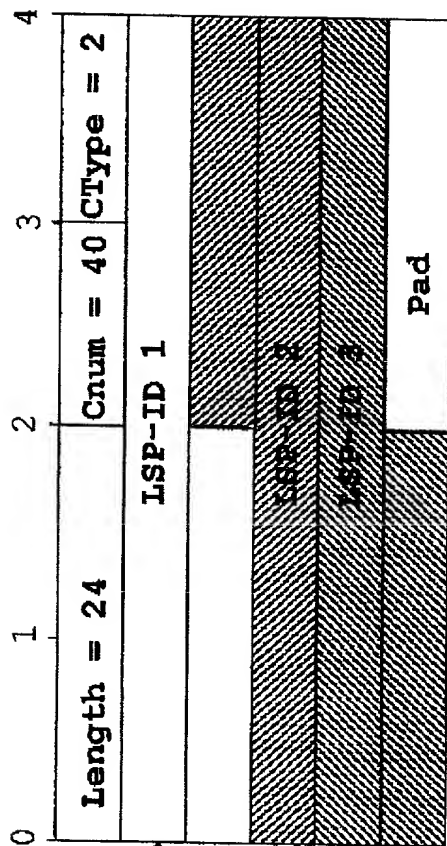

~~Figure 10 COPS Specific Object for LSP-IDs~~

48  
55  
77

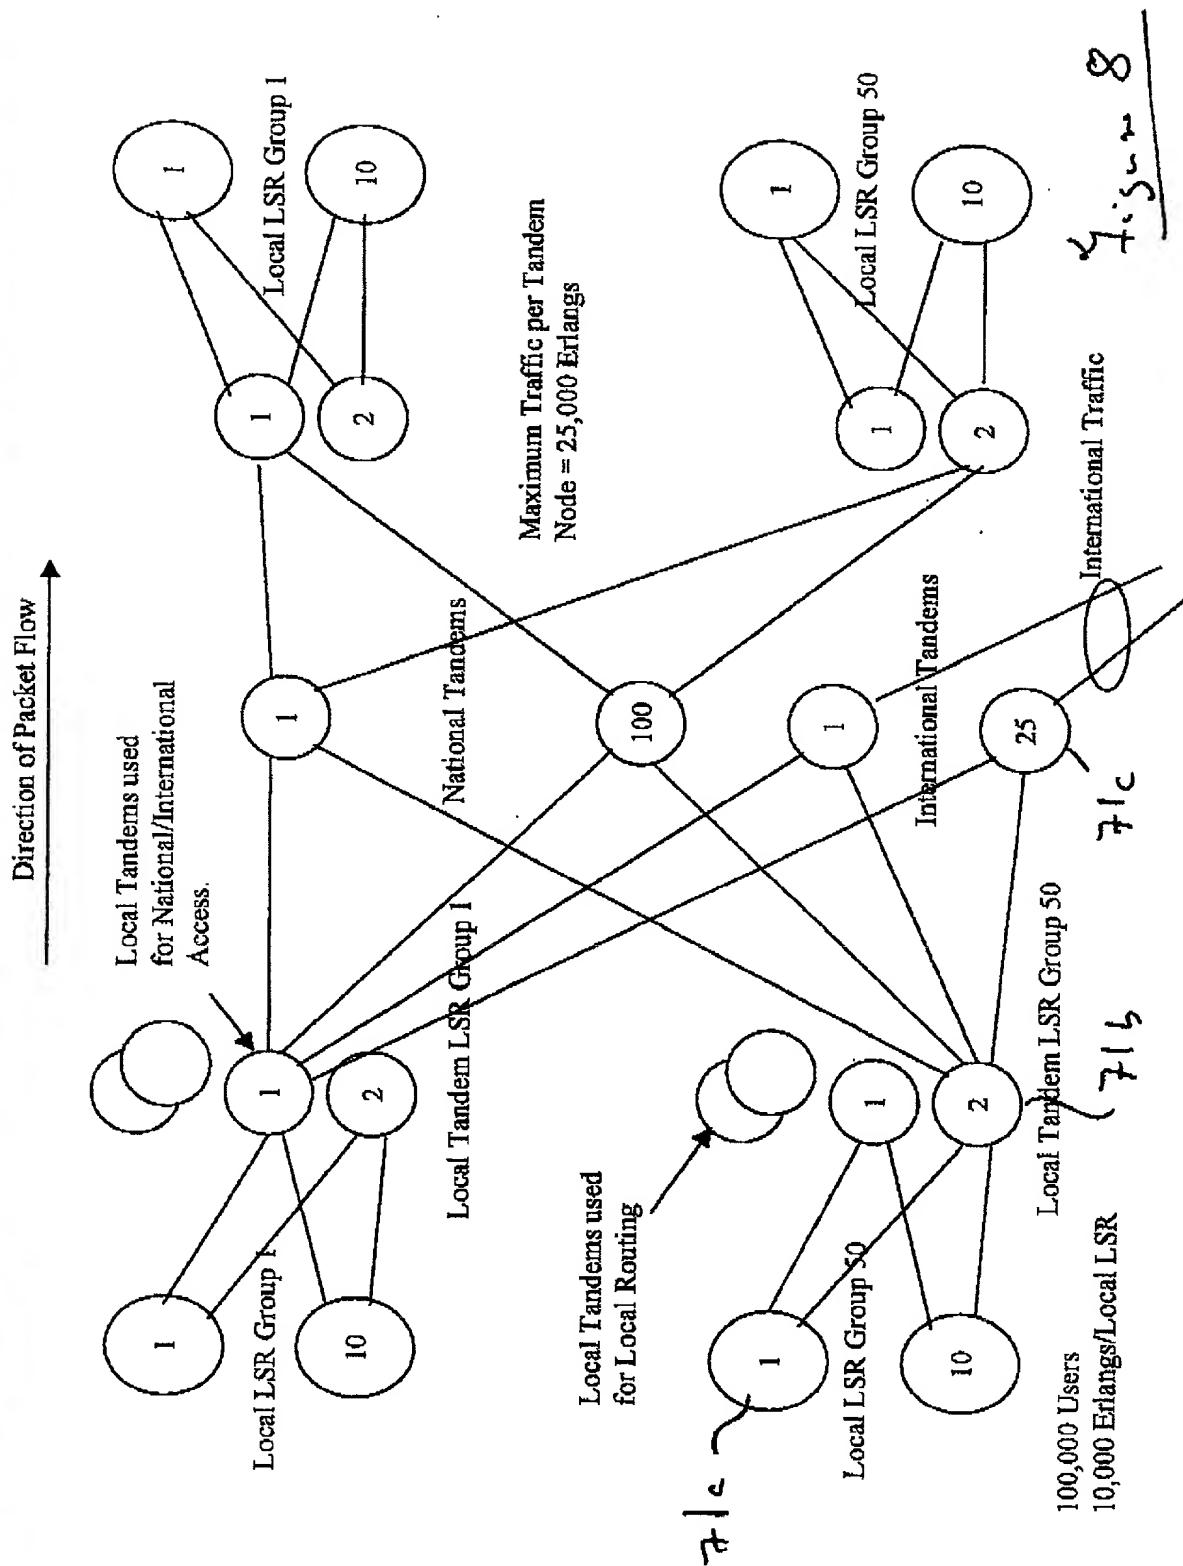

~~Figure 7 MPLS Network for Session Switching for Fifty Million US Users plus Fifty Million International Users~~



9/25/20

Figure 8 Packet Formats on Ingress and Egress for Five-stage MPLS Network

LSP-ID List:

(MG-LSP A, DM-LSP Ax, Ay, Az)

(MG-LSP A, DM-LSP A, DM-LSP B, MG-LSP B)

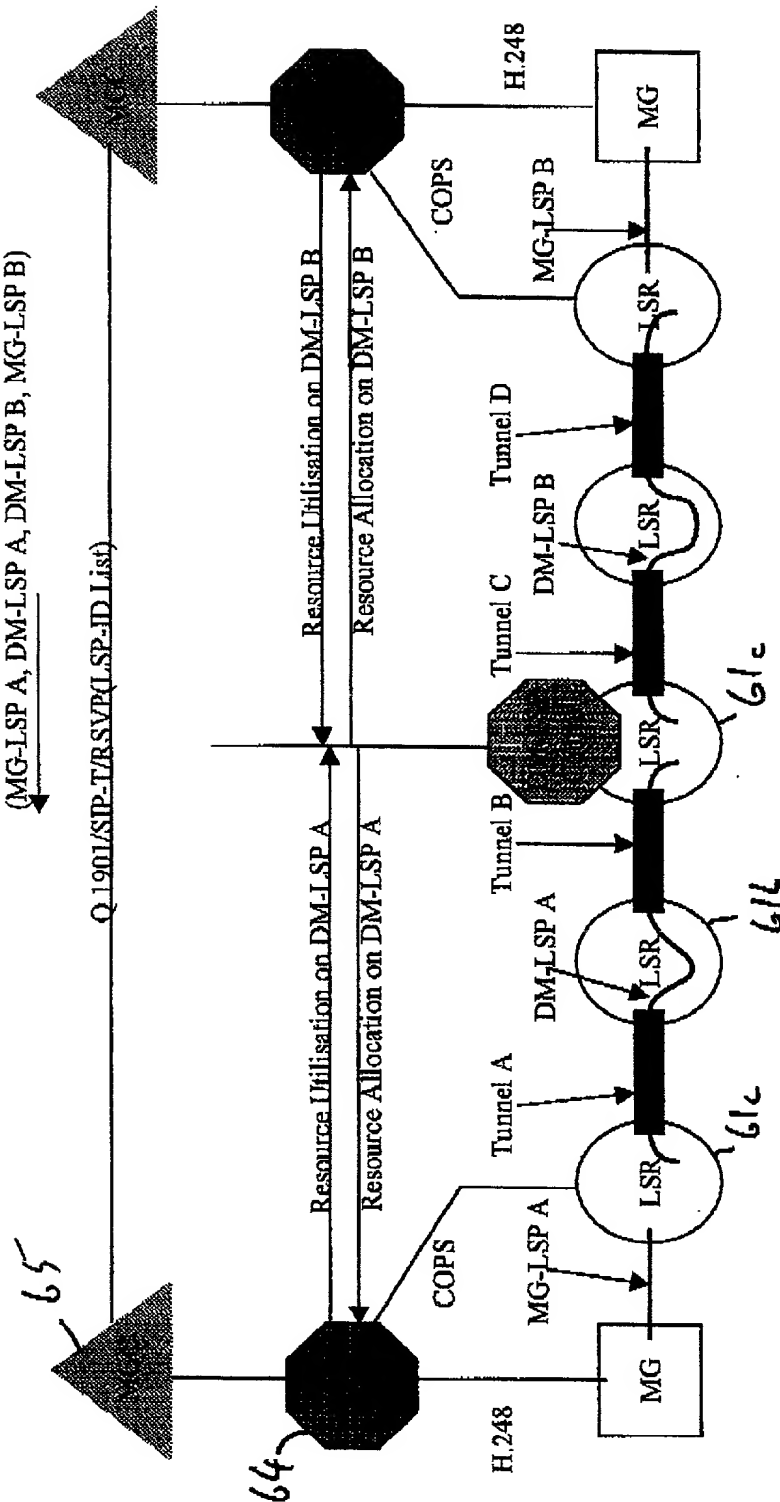


Fig 10

Figure 9 Control Environment for Five-stage MPLS Network